

Hisense



บริษัท ไฮเซนส์ อินเตอร์เนชั่นแนล (ประเทศไทย) จำกัด

เลขประจำตัวผู้เสียภาษี : 0105559065594 สำนักงานใหญ่

ที่อยู่ : 202 อาคารเลอคูงคอร์ด ทาวเวอร์ ชั้นที่ 14 ห้อง 1401
ถนนรัชดาภิเษก แขวงห้วยขวาง เขตห้วยขวาง กรุงเทพฯ 10310

โทร : 02-018-9788 แฟกซ์ 02-018-9780

หมายเหตุ : ตรวจสอบรายละเอียดของสินค้า ราคา และโปรโมชั่นเพิ่มเติม ณ จุดขาย,สินค้าบางรุ่นมีจำหน่าย เฉพาะบางสาขาเท่านั้น ,บริษัทฯ ขอสงวนสิทธิ์การแปลงเปลี่ยนหรือยกเลิกโปรโมชั่นและเงื่อนไขต่างๆโดยไม่ต้องแจ้งให้ทราบล่วงหน้า

Hisense reserves the right to make changes in specifications without prior notice.

Hisense

2024 CLIMATIZZATORI



CONTENTS

Introduce the Hisense	02
Introduction of commercial air conditioner	03
Product line	05
Inverter expert	09
Product Material	10
Universal Features	11
Features for Cassette Indoor Unit	15
Features for Floor Ceiling Indoor Unit	19
Outlines and dimensions	22

INTRODUCE THE HISENSE

Hisense air conditioning company was established in 1996.

Named with “sea” and “trustworthiness”, Hisense has its way through the spirit of opening-up, inclusiveness, sincerity and trustworthiness.

It is the birthplace of the first inverter air conditioner in China. With cutting-edge scientific research capability and high-quality manufacturing, Hisense air conditioning has become a globally leading representative in the field of home appliances.


TECHNOLOGY CHANGES OUR LIVES

Slim duct, providing maximum comfort with ultra-thin low-static technology, is preferred by many families. Cassette unit, being equipped with 360° round airflow, fresh air intake, AI, slim design and hidden display, can satisfy differentiated demands from customers.

Ceiling and floor unit can cater to the installation requirements of different places. Floor standing units with various appearances can meet the diversified choices from 18K to 96K BTU per hour.



Product line



Mark5- Cassette



Nylon filter



Super mode



Smart mode



Fresh-air Intake



Auto Restart




Timer 24h




Room Card Control



ON/OFF
Function



Filter Check



Built-in Drain Pump



Wired controller



Water-level
switch

Model Name		AUC-18TR4RJA2	AUC-24TR4RJA2	AUC-30TR4RJA2	AUC-36TR4RKA2	AUC-42TR4RKA2	AUC-48TR4RKA2	AUC-55TR6RNKA
Indoor model								
Outdoor model								
Power supply (Indoor)		V/Ph/Hz	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50
Power supply (Outdoor)		V/Ph/Hz	220/1/50	220/1/50	220/1/50	380/3/50	380/3/50	380/3/50
Max. input consumption		W	1800	3200	3800	4300	5000	6600
Max. input current		A	9.5	14.2	16.8	19	9.5	12
Performance	Capacity	Btu/h	18000	24000	30000	37500	42650	50160
	Capacity	W	5400	7600	8800	11000	12500	15200
	Capacity range	W	2100-5800	2500-8000	3000-9400	2730-11500	3700-12800	4600-15800
	Input Power	W	1380	2200	2720	3350	3650	5100
	Input Power range	W	340-1650	520-2850	650-3600	900-4700	1100-6300	1050-6350
	Current	A	8.1	8.9	12.0	14.3	7.0	9.0
	SEER		21.56	18.77	16.48	18.02	17.74	16.65
	Star	/	★★★	★	/	★	★★	★
Indoor fan motor	Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
	Qty		1	1	1	1	1	1
	Input	W	81	81	81	81	101	101
	Speed(Hi/Med/Lo)	r/min	480/400/360	550/470/400	570/530/440	660/560/480	720/640/570	720/640/570
Indoor Coil	Fin type		Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium
	Tube type		Innergroove, Copper	Innergroove, Copper	Innergroove, Copper	Innergroove, Copper	Innergroove, Copper	Innergroove, Copper
	Coil (LxHxW)	mm	2106×189×27.2	2106×189×27.2	(2042+2106)×189×13.6	2096×231×40.8	2096×231×40.8	2096×231×40.8
Indoor air flow Rated(Hi/Med/Lo)		CFM	735/647/560	794/676/618	912/824/677	970/853/706	1176/1029/911	1176/1029/911
Indoor noise level Rated (Hi/Med/Lo)		dB(A)	40/35/33	44/40/35	48/44/40	50/47/43	52/50/48	52/50/48
Indoor unit	Dimension (WxHxD)	mm	840×236×840	840×236×840	840×236×840	840×272×840	840×840×272	840×840×272
	Packing(LxHxW)	mm	950×950×320	950×950×320	950×950×320	950×950×360	950×950×360	950×950×360
	Net/Gross weight	kg	23.0/28.0	23.0/28.0	22.4/27.8	26/32	26/32	26/32
Panel	Dimension (WxHxD)	mm	950×50×950	950×50×950	950×50×950	950×50×950	950×50×950	950×50×950
	Packing(LxHxW)	mm	1020×1000×105	1020×1000×105	1020×1000×105	1020×1000×105	1020×1000×105	1020×1000×105
	Net/Gross weight	kg	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9.0	6.5/9
Drainage water pipe diameter		mm	ODΦ32	ODΦ32	ODΦ32	ODΦ32	ODΦ32	ODΦ32
Controller			Wireless remote	Wireless remote	Wireless remote	Wireless remote	Wireless remote	Wireless remote
Compressor	Type		ROTARY	ROTARY	ROTARY	ROTARY	ROTARY	ROTARY
	Input Power	W	875	1185	6530	7760	2765	2765
	Rated current(RLA)	A	5.8	7.7	8.5	9.3	5	5
Outdoor fan motor	Model		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
	Qty		1	1	1	1	1	2
	Output	W	40	60	60	102	220	220
	Speed (Hi)	r/min	880	880	880	880	850	880
Outdoor coil	Fin type		Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium
	Tube type		Innergroove, Copper	Innergroove, Copper	Innergroove, Copper	Innergroove, Copper	Innergroove, Copper	Innergroove, Copper
	Coil (LxHxW)	mm	842×546×36.38	900×630×36.38	(900+871)×630×18.19	975×714×43.3	957×798×54.57	894×1134×43
Outdoor noise level Rated (Hi)		dB(A)	50	53	54	58	62	56
Throttle type			EEV	EEV	EEV	EEV	EEV	EEV
Outdoor unit	Dimension(WxHxD)	mm	810×580×280	860×670×310	810×580×280	900×750×340	975×835×360	975×835×360
	Packing(WxHxD)	mm	940×420×640	990×450×730	940×420×640	1040×830×460	1045×460×960	1045×460×960
	Net/Gross weight	kg	33.0/35.5	40.0/44.0	40/43.3	51.5/55.5	71.5/80.5	71.5/80.5
Refrigerant type/Quantity	Type		R32	R32	R32	R32	R32	R32
	Charged volume	kg	0.97	1.20	1.3	1.90	2.55	2.55
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ12.7(1/4"/1/2")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")
	Max. pipe length	m	25	50	50	50	50	50
	Max. difference in level	m	15	30	30	30	30	30
Circuit breaker		A	20	25	25	32	25	25
Main power cable		mm2	3×2.5	3×2.5	3×2.5	3×2.5	5×2.5	5×2.5
Transmitting cable		mm2	4×1.5	4×1.5	4×1.5	4×1.5	4×1.5	4×1.5

Product line



Mark5- Floor ceiling



Super mode



Smart mode



Fresh-air Intake



Double swing automatic



Auto Restart



Timer 24h



Room Card Control



ON/OFF Function



High ceiling Mode



Multiple installation types




Wired controller




Three directions for pipeline

Model Name		AUV-18TR4RAA2	AUV-24TR4RAA2	AUV-30TR4RBA2	AUV-36TR4RCA2	AUV-42TR4RCA2	AUV-48TR4RCA2	AUV-55TR6RNCA
Indoor model								
		AUV18TRAA2T-IDU	AUV24TRAA2T-IDU	AUV30TRBA2T-IDU	AUV36TRCA2T-IDU	AUV42TRCA3T-IDU	AUV48TRCA3T-IDU	AUV-55TR4RCA
Outdoor model								
		AUV18TRAA2T-ODU	AUV24TRAA2T-ODU	AUV30TRBA2T-ODU	AUV36TRCA2T-ODU	AUV42TRCA3T-ODU	AUV48TRCA3T-ODU	AUV-55T6RN
Power supply (Indoor)		V/Ph/Hz	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50	220/1/50
Power supply (Outdoor)		V/Ph/Hz	220/1/50	220/1/50	220/1/50	380/3/50	380/3/50	380/3/50
ax. Input consumption		W	1800.00	3200.00	3800.00	4300.00	5000.00	6600
Max. input current		A	9.50	14.20	16.80	19.00	9.50	12.00
Performance	Capacity	Btu/h	18000.00	24000.00	30000.00	38500.00	46060.00	50330.00
	Capacity	W	5400.00	7300.00	8800.00	11280.00	13500.00	14750.00
	Capacity range	W	2000-5800	2700-7500	3000-9600	2730-11500	3700-12800	4600-15800
	Input Power	W	1500.00	2140.00	2720.00	3400.00	4450.00	5300.00
	Input Power range	W	340-1700	550-2750	660-3750		900-4700	1100-6300
	Current	A	9.00	9.50	12.90	15.40	7.00	9.00
	SEER	-	18.94	18.77	16.92	18.08	15.66	15.46
Indoor fan motor	Star	-	★	★	/	★	★	/
	Model		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
	Qty		1	1	1	1	1	1
	Input	W	100.00	100.00	140.00	181.00	181.00	181.00
Indoor coil	Speed(HI/Med/Lo)	r/min	1000/900/800	1150/1030/910	1150/930/800	1250/1000/900	1350/1100/1000	1350/1100/1000
	Fin type		Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium
	Tube type		innergroove, Copper	innergroove, Copper	innergroove, Copper	innergroove, Copper	innergroove, Copper	innergroove, Copper
Indoor unit	Coil (LxHxW)	mm	660x294x40.8	660x294x40.8	930x294x40.8	1200x294x40.8	1200x294x40.8	1200x294x40.8
	Indoor air flow Rated (HI/Med/Lo)	CFM	590/520/460	705/560/470	883/706/588	1205/941/823	1294/1117/941	1690x820x350
	Indoor noise level Rated (HI/Med/Lo)	dB(A)	47/44/40	48/45/41	51/46/42	53/48/45	56/51/48	56/51/48
Indoor unit	Dimension (WxHxD)	mm	990x680x230	990x680x230	1285x680x230	1580x680x230	1580x680x230	46/54
	Packing(LxHxW)	mm	1100x820x350	1100x820x350	1400x820x350	1690x820x350	1690x820x350	2200/1900/1600
	Net/Gross weight	kg	30.0/35.0	30.0/35.0	37.4/43.4	46/54	46/54	1294/1117/941
Drainage water pipe diameter		mm	ODΦ25	ODΦ25	ODΦ25	ODΦ25	ODΦ25	ODΦ25
Controller			Wireless remote	Wireless remote	Wireless remote	Wireless remote	Wireless remote	Wireless remote
Compressor	Type		ROTARY	ROTARY	ROTARY	ROTARY	ROTARY	ROTARY
	Input	W	875.00	1185.00	6530.00	7760.00	2765.00	2765.00
	Rated current(RLA)	A	5.80	7.70	8.5	9.30	5.38	5.38
	Refrigerant oil	ml	ESTEL OIL RB74AF 310	ESTER OIL VG74 450	ESTER OIL VG74 630	ESTER OIL VG74 620	ESTER OIL VG74 1000	ESTER OIL VG74 1000
Outdoor fan motor	Fan motor type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
	Qty		1	1.00	1.00	1.00	1.00	1.00
	Output	W	40	60.00	60	102.00	220	220
	Speed (HI)	r/min	880.00	880.00	880	880.00	850	850
Outdoor coil	Fin type		Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium	Hydrophilic aluminium
	Tube type	-	innergroove, Copper	innergroove, Copper	innergroove, Copper	innergroove, Copper	innergroove, Copper	innergroove, Copper
	Coil (LxHxW)	mm	842x546x36.38	900x630x36.38	(900+871)x630x18.19	975x714x43.3	957x798x54.57	957x798x54.57
Outdoor noise level Rated (HI)		dB(A)	50.00	53	54	58.00	62	62
Throttle type			EEV	EEV	EEV	EEV	EEV	EEV
Outdoor unit	Dimension(WxHxD)	mm	810x580x280	860x670x310	810x580x280	900x750x340	975x835x360	975x835x360
	Packing(WxHxD)		940x420x640	990x450x730	940x420x640	1040x830x460	1045x460x960	1045x460x960
	Net/Gross weight	kg	33.0/35.5	40.0/44.0	40/43.3	51.5/55.5	71.5/80.5	71.5/80.5
Refrigerant type/Quantity	Type		R32	R32	R32	R32	R32	R32
	Charged volume	kg	0.97	1.20	1.3	1.90	2.55	2.55
Refrigerant piping	Liquid side/ Gas side	mm(inch)	Φ6.35/Φ12.7(1/4"/1/2")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")	Φ9.52/Φ15.88(3/8"/5/8")
	Max. pipe length	m	25.00	50.00	50.00	50.00	50.00	50.00
	Max. difference in level	m	15.00	30.00	30.00	30.00	30.00	30.00
Circuit breaker		A	20	25	25	32	25	25
Main power cable		mm2	3 x 2.5	3 x 2.5	3 x 2.5	3 x 2.5	5 x 2.5	5 x 2.5
Transmitting cable		mm2	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5	4 x 1.5


PID&Fuzzy Control

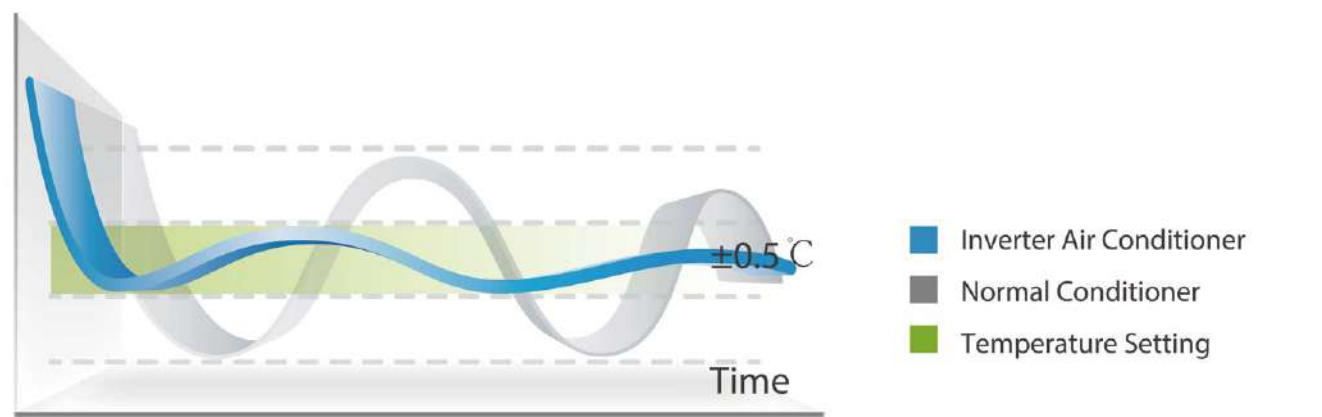

SAVING ENERGY

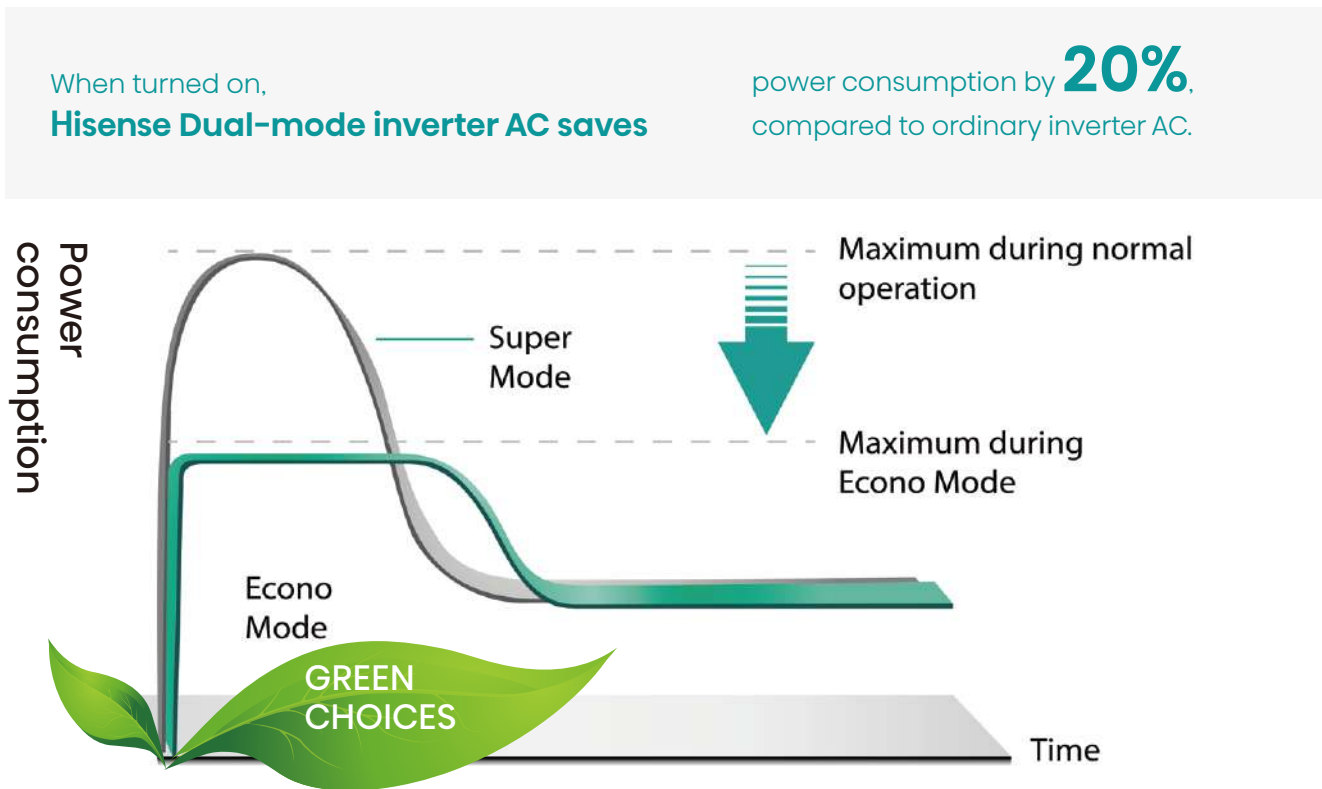


GOLDEN FIN(OPTIONAL)

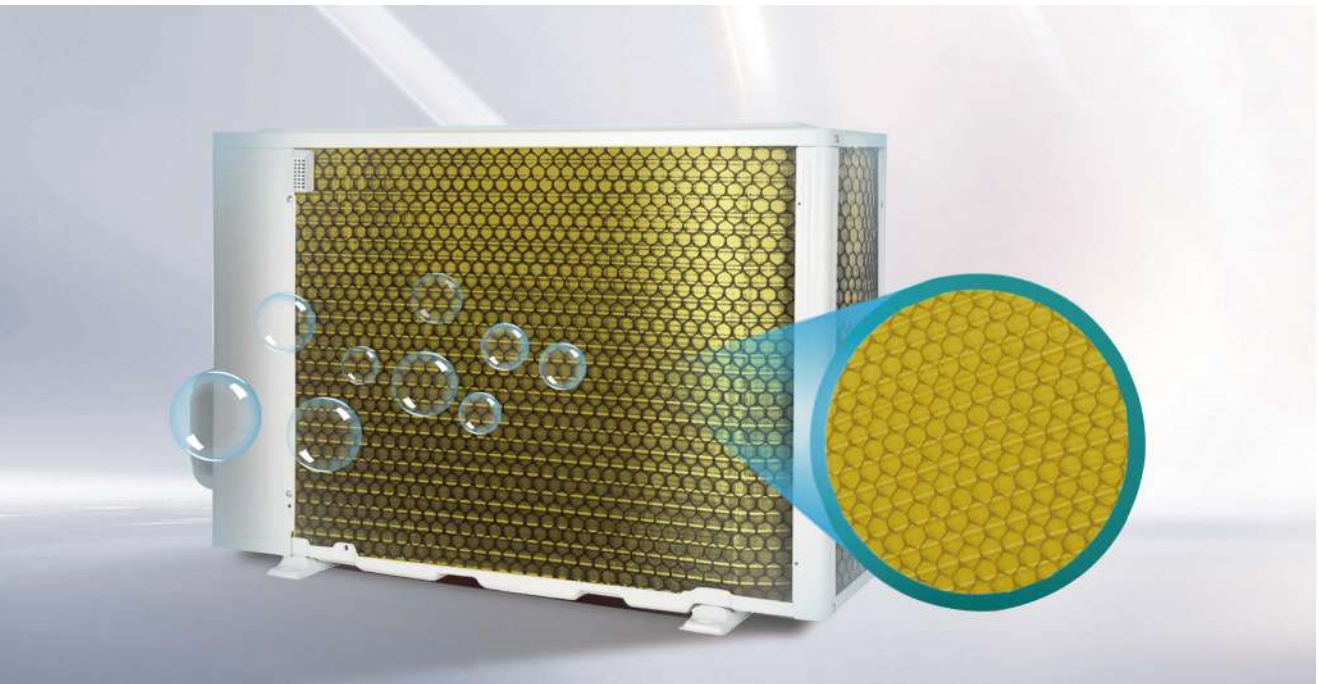

The unique anticorrosive golden fin can withstand the salty air, rian and other corrosive elements.
Also, it is high end stylish and more attractive than normal fin.

LOW/HIGH PRESSURE SWITCH

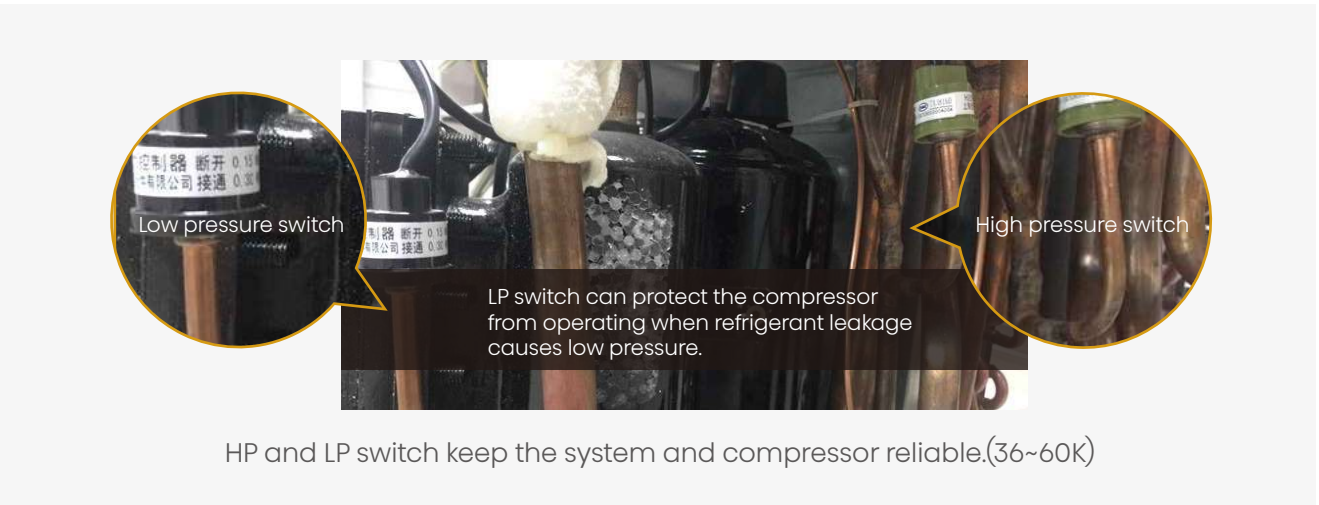



Universal Features

BOTH IDU & ODU BLDC MOTOR



The brushless DC fan motor gives you high efficiency and energy savings. Compare to AC motor, BLDC motor runs more stable and low noise.

WIDE OPERATING RANGE



Stronger Cooling Capability At High Ambient Temperature

-7°C~48°C

Note: Refer to the temperature range in specs for the specific model.

SUPER COOLING



Press the "SUPER" button on the remote controller to immediately feel the cool air you desire



Super cooling


REFRIGERANT LEAKAGE DETECTION



The indoor unit automatically stops when it detects refrigerant leakage and show the error code, providing extra protection.


Universal Features

CONVENIENT INSTALLATION

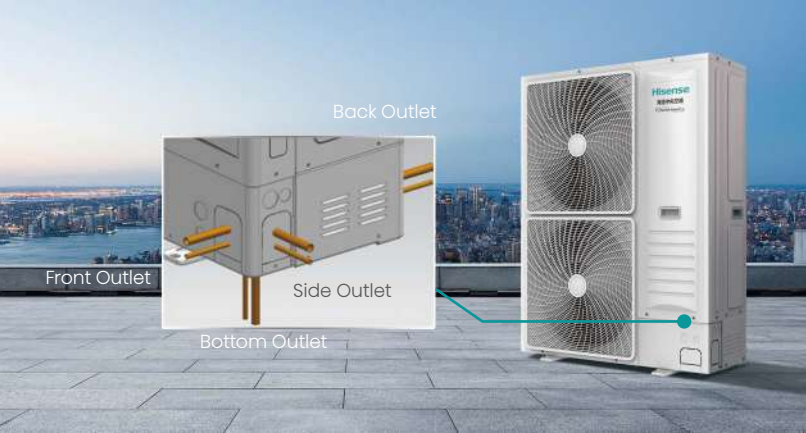

Four access can be selected for pipe connecting($\geq 36K$)


SLEEPING FUNCTION

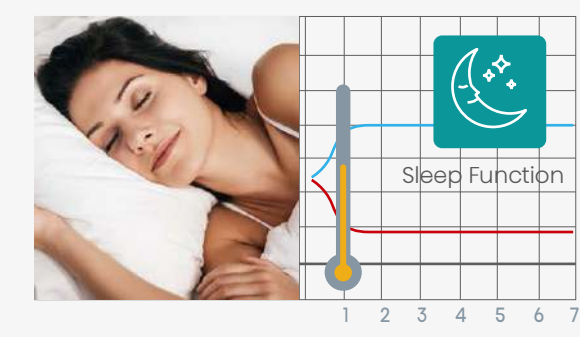

SLEEP mode can be set in **COOLING** or **DRYING** mode. This function gives you a more comfortable environment for sleep. The appliance will stop operation automatically after operating for 8 hours. Fan speed is automatically set at low speed.

FIRE CONTROL

Fire control
-Fire alarm by connecting the smoke sensor

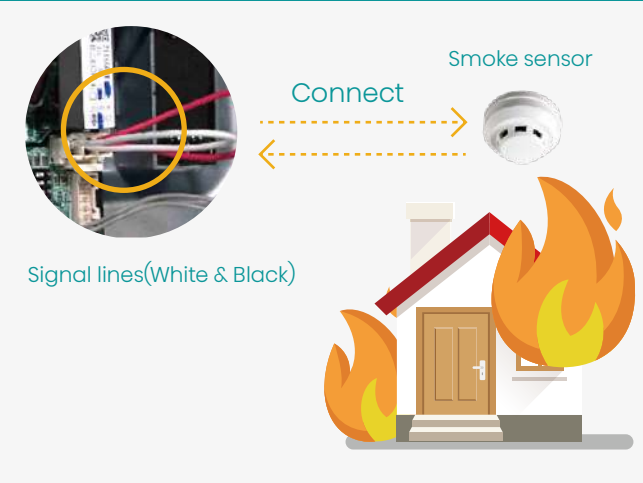


ROOM CARD CONTROL

Hotel room card control
-Insert room card for power




AUTO RESTART

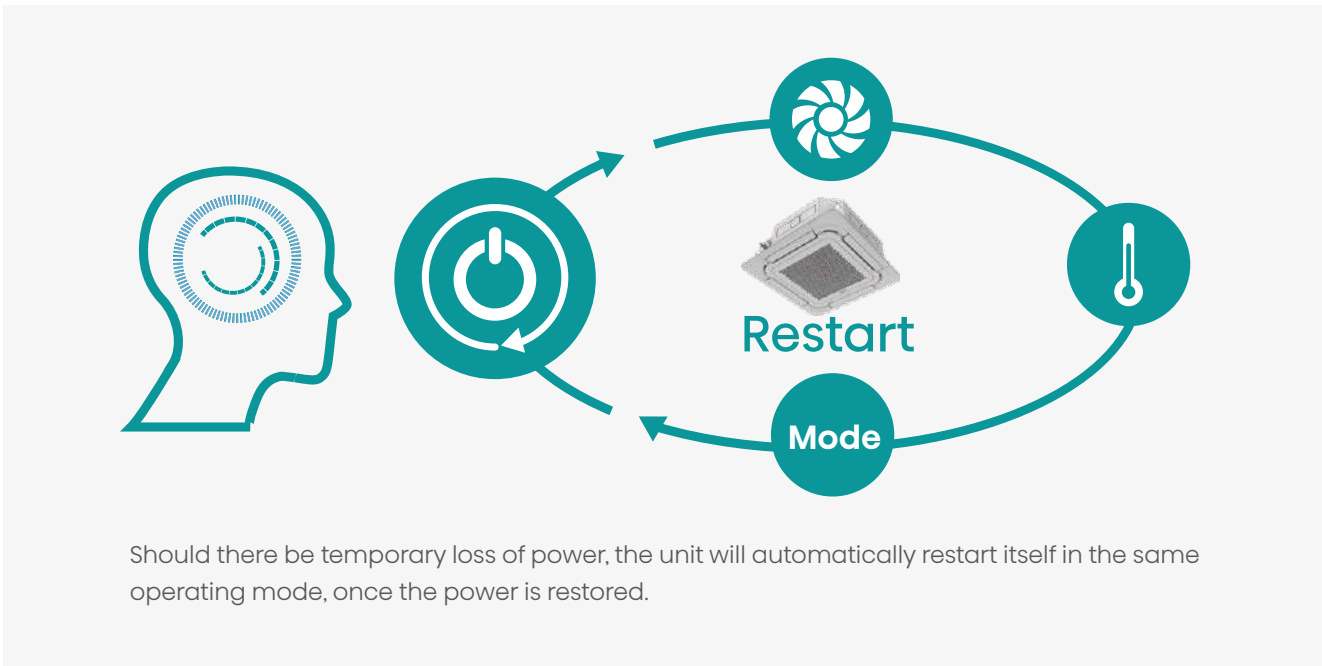

Should there be temporary loss of power, the unit will automatically restart itself in the same operating mode, once the power is restored.

R32 REFRIGERANT

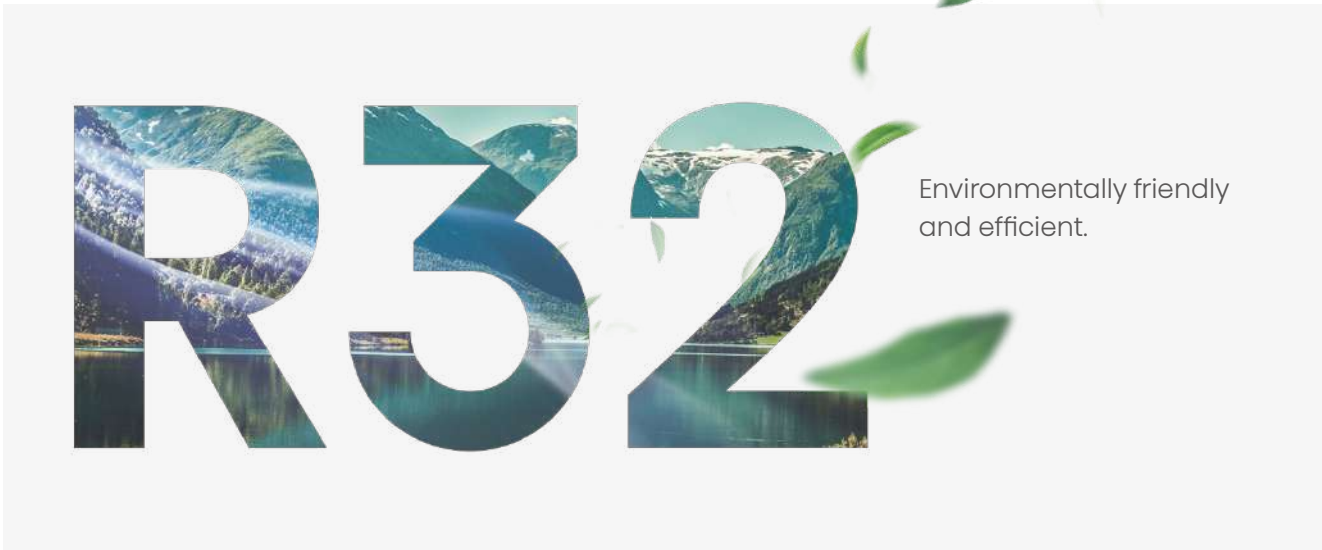


Environmentally friendly and efficient.



Features for Cassette Indoor Unit



R32
INVERTER- CASSETTE

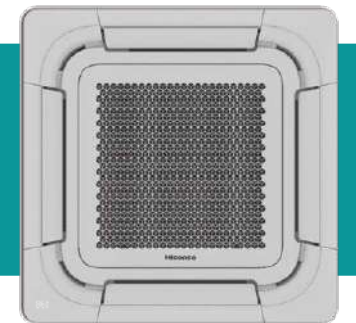

FRESH AIR INTRODUCE

Improve indoor air freshness



EASY-TO-CLEAN FILTER

Effectively filter harmful particles




360°ROUND FLOW


Uniform temperature distribution

BIG LOUVER

With 88°free swinging angle

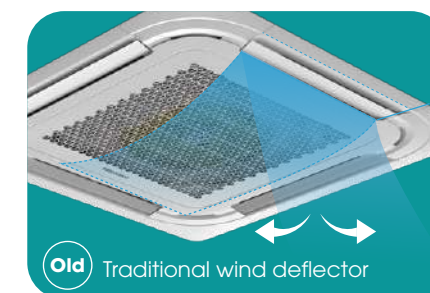

Old Traditional wind deflector

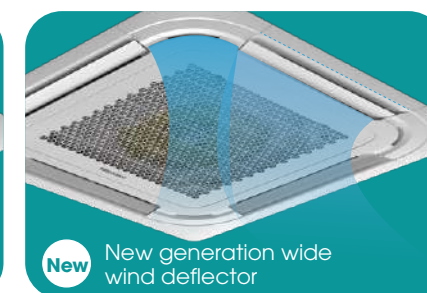


New New generation wide wind deflector



Features for Cassette Indoor Unit

INDEPENDENT CONTROL (OPTIONAL)

Circulating airflow, independent airflow direction control by the air deflector and 4 swinging flow perfectly cater to the space structure and feelings of different experience.

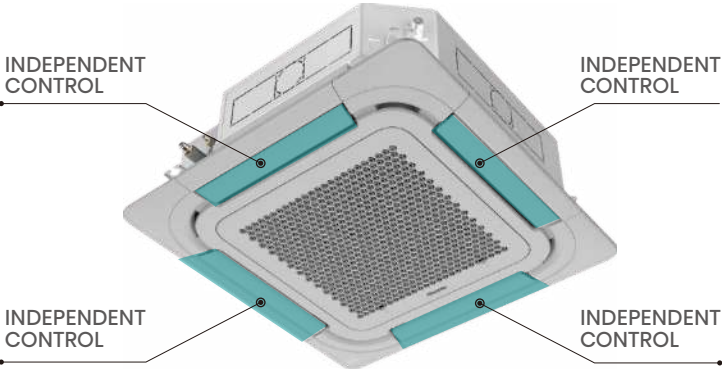

BACKWARD CENTRIFUGAL FAN

With excellent air supply, high efficiency, low noise and loss, higher reliability.




FIVE-FOLD EVAPORATOR

Larger heat exchange area, higher efficient, more power-saving than traditional four-fold evaporator.




SLIM DESIGN

236MM Ultra-thin body slim and saves more space.

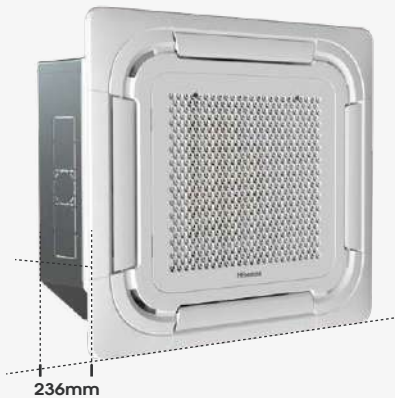


FLEXIBLE INSTALLATION

Anti-overflow design and high-lift water pump, pipeline installation is more flexible.

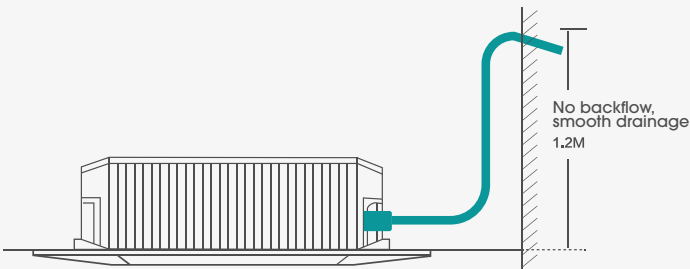

ANTIBACTERIAL MODULE (OPTIONAL)

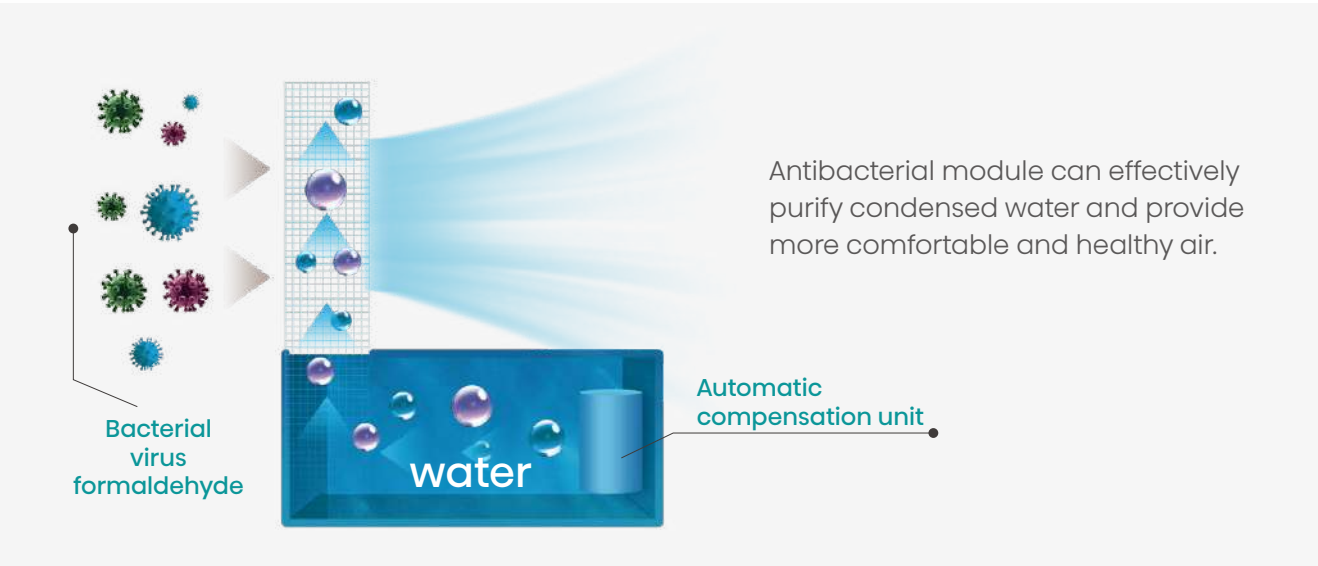



Features for Floor Ceiling Indoor Unit




R32
Inverter- Floor ceiling




3D AUTO-SWING

No matter which corner you are in the room, you can feel the cooling, more convenient and comfortable.

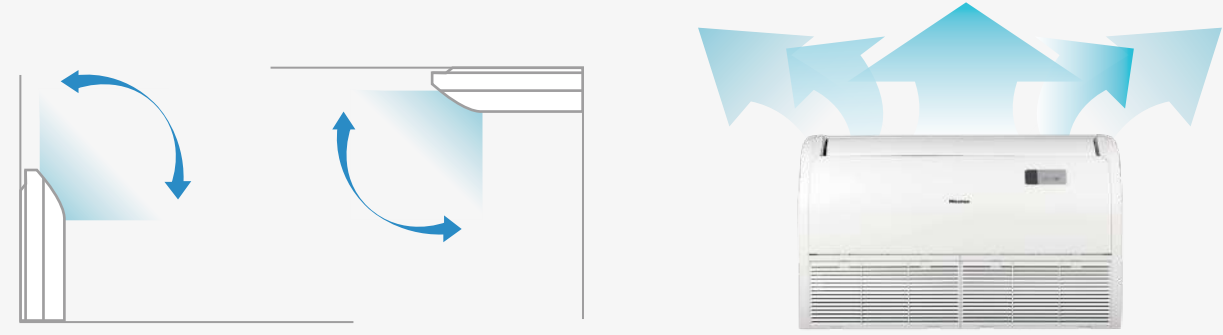

3D Air flow provides you more comfort

CONVENIENT PIPE DESIGN

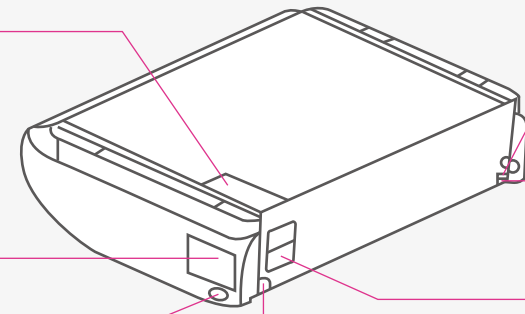

- Top outlet
- Right outlet
- Right outlet(right)
- Drain outlet (left)
- Drain outlet (rear left)
- Drain outlet (rear right)
- Rear outlet (Only use the bottom side)