




U-MATCH G2 INVERTER

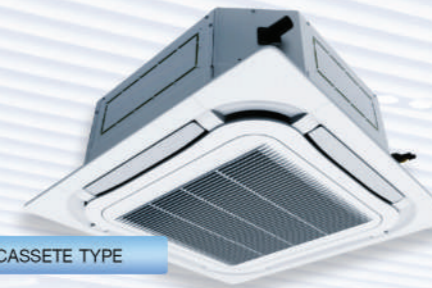

CASSETTE TYPE

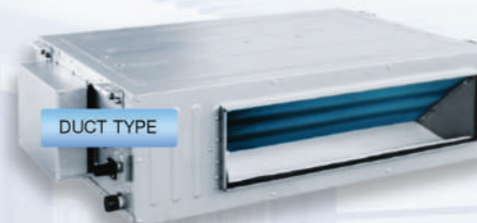

DUCT TYPE

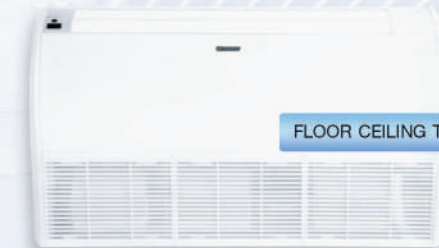

FLOOR CEILING TYPE



OUTDOOR UNIT



*100W-รุ่น 60K

*100W-รุ่น 18K, 24K, 30K, 36K, 42K, 48K

Ceiling Type (G2)

เครื่องปรับอากาศแบบแขวน



หลากหลายฟังก์ชันเพื่อความสะดวกสบาย

- Washable Filter
- Easier Maintainability
- Quality Motor
- Horizontal Swing
- Inner Groove Copper
- Turbo Function
- Child Lock
- Auto Clean
- Self Diagnosis
- High Efficiency
- Compact Design
- Wide Operation range
- Wide Voltage range
- High ESP

Optional



Wireless remote controller
รุ่น YAC1B1

รุ่นประหยัดไฟเบอร์ 5 (EGAT No.5)

Indoor Unit	Model	GULD18ZD(N)/I	GULD24ZD(N)/I	GULD30ZD(N)/I	GULD36ZD1/A-S	GULD42ZD1/A-S	GULD48ZD1/A-S	GULD60ZD1/A-S
Cooling Capacity	Btu/hr	18,078	24,287	30,557	37,000	44,000	49,000	56,000
Cooling Capacity (Min - Max)	Btu/hr	(6,800 - 19,200)	(8,800 - 27,700)	(6,800 - 33,100)	(11,000 - 37,600)	(14,300 - 51,200)	(16,400 - 56,000)	(16,000 - 58,000)
Power Supply	V/Ph/Hz	220-240V /1Ph /50Hz						
Power Input	Watt	1,522	1,873	2,892	3,180	4,100	5,000	5,800
Current Input	A	7.19	8.85	13.31	14.50	19.0	23.00	26.00
SEER	Btu/hr/Watt	18.53	18.05	18.60	18.08	17.57	16.79	16.51
EGAT No.5		★	★	★	★	★	★	★
ค่าไฟฟ้า (บาท / ไร่)		14,244	19,644	23,986	29,879	36,562	42,609	49,521
Noise Level (Super-High/High/Middle/Low)	dB (A)	48/40/38/34	50/43/40/37	52/46/45/43	54/51/49/44	49/46/42/39	52/49/46/42	53/52/49/46
Air Flow Volume (Super-High/High/Middle/Low)	CFM	559/412/353/294	912/717/647/570	1,000/811/765/719	1,235/1,140/1,045/893	1,354/1,177/1,000/824	1,530/1,345/1,177/942	1,412/1,295/1,118/942
Outline Dimension (W*D*H)	mm.	870*665*235	1,200*655*235	1,200*655*235	1,570*655*235	1,570*665*235	1,570*665*235	1,570*665*235
Package Dimension (L*W*H)	mm.	1,033*770*330	1,363*770*300	1,363*770*300	1,729*770*300	1,669*770*300	1,669*770*300	1,669*770*300
Evaporator Form		Aluminium Fin - Copper Tube						
Net Weight/Gross Weight	Kg.	26.0/31.0	31.0/38.0	32.0/38.0	42.0/49.0	40.0/47.0	42.0/49.0	95.00/49.0
Power Supply	V/Ph/Hz	220-240V /1Ph /50Hz						
Power Source		Outdoor						
Refrigerant	Type	R32						
Compressor Brand		GREE	GREE	GREE	GREE	GREE	GREE	GREE
Compressor Type		Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Rotary	Inverter Rotary
Connecting Pipe	Liquid side-mm (In.)	Ø6.35 1/4"	Ø6.35 1/4"	Ø6.35 1/4"	Ø6.35 1/4"	Ø9.52 3/8"	Ø9.52 3/8"	Ø9.52 3/8"
	Gas side-mm (In.)	Ø12.7 1/2"	Ø15.8 5/8"	Ø15.8 5/8"	Ø15.8 5/8"	Ø15.8 5/8"	Ø15.8 5/8"	Ø15.8 5/8"
Sound Pressure Level	dB (A)	58	58	56	58	58	60	58
Air Flow Volume	CFM	1,177	2,119	2,119	2,648	3,060	3,060	4,120
Outline Dimension (W*D*H)	mm.	802*555*350	958*402*660	958*402*660	1,000*427*746	940*370*820	940*370*820	900*340*1,260
Package Dimension (L*W*H)	mm.	872*398*620	1,032*456*737	1,032*456*737	1,080*483*810	1,093*497*885	1,093*497*885	1,033*443*1,405
Condenser Form		Aluminium Fin - Copper Tube						
Net Weight/Gross Weight	Kg.	31.0/33.5	41.5/46.0	44.5/49.0	54.0/59.50	69.0/76.0	72.0/79.0	94.0/104.0
Max Distance (Height/Length)	m.	10.0/25.0	25.0/40.0	25.0/40.0	25.0/40.0	30.0/75.0	30.0/75.0	30.0/50.0

รุ่น มอก.

Indoor Unit	Model	GULD120ZD1/A-S1	GULD140ZD1/A-S1	GULD160ZD1/A-S1
Cooling Capacity	Btu/hr	42,000	47,800	54,500
Cooling Capacity (Min - Max)	Btu/hr	(9,500 - 44,400)	(14,300 - 51,200)	(16,400 - 56,000)
Power Supply	V/Ph/Hz	220-240V /1Ph /50Hz		
Power Input	Watt	4,380	4,700	5,400
Current Input	A	20.00	22.00	25.60
SEER	Btu/hr/Watt	10.18	10.80	10.73
EGAT No.5		-	-	-
ค่าไฟฟ้า (บาท / ไร่)		-	-	-
Noise Level (Super-High/High/Middle/Low)	dB (A)	54/51/49/44	49/46/42/39	52/49/46/42
Air Flow Volume (Super-High/High/Middle/Low)	CFM	1,235/1,140/1,045/893	1,354/1,177/1,000/824	1,530/1,354/1,177/942
Outline Dimension (W*D*H)	mm.	1,570*665*235	1,570*665*235	1,570*665*235
Package Dimension (L*W*H)	mm.	1,729*770*300	1,699*770*300	1,699*770*300
Evaporator Form		Aluminium Fin - Copper Tube		
Net Weight/Gross Weight	Kg.	42.0/49.0	42.0/47.0	42.0/49.0

รุ่น มอก. (G1)

Indoor Unit	Model	GUD140ZD/A-T	GUD160ZD/A-T
Power Supply	V/Ph/Hz	380-415V /3Ph /50Hz	
Cooling Capacity	Btu/hr	45,700	54,500
Maximum Power Input	Watt	4,300	5,450
Maximum Current input	A	6.60	7.70
SEER/ (EER)	Btu/hr/Watt	10.63	10.09
EGAT No.5		-	-
ค่าไฟฟ้า (บาท / ไร่)		-	-
Noise Level (Super-High/High/Middle/Low)	dB (A)	50/48/44	53/49/45
Air Flow Volume (Super-High/High/Middle/Low)	CFM	1,236/1,117/1,059/881	1,354/1,129/1,100/936
Outline Dimension (W*D*H)	mm.	1,570*665*235	1,570*665*235
Package Dimension (L*W*H)	mm.	1,729*770*300	1,729*770*300
Net Weight/Gross Weight	Kg.	42/49	42/49



